



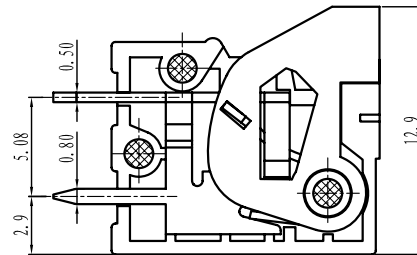



慈溪市万捷电子有限公司

CIXI WANJIE ELECTRONIC CO., LTD

产品规格书
product specification



SECTION A-A

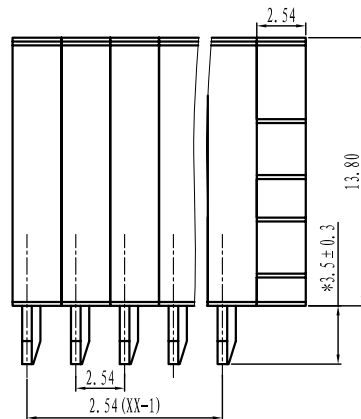

电气性能/Electrical

参考标准/Standard: UL IEC
 额定电压/Rated voltage: 150V 130V
 额定电流/Rated current: 2A 6A
 使用线径/Wire range: 26-18AWG 1.0mm²
 耐电压/Withstanding voltage: AC1250V/1Min
 绝缘电阻/Insulation resistance: 500M Ω /DC500V

机械性能/Mechanical

温度范围/Temp.Range: -40 $^{\circ}$ C~+105 $^{\circ}$ C
 瞬间温度/MAX Soldering: +250 $^{\circ}$ C, for 5 Sec
 剥线长度/Strip length: 11mm


尺寸/Dimensions

间距/Pitch: 2.54mm
 极数/Poles: 1P-XXP

材质及电镀/Material

塑件/Housing: PA66, UL94V-0
 簧片/Wire guard: Stainless steel(SUS301)
 焊脚/Pin header: Brass, Tin plated

订购方式:
HOW TO ORDER

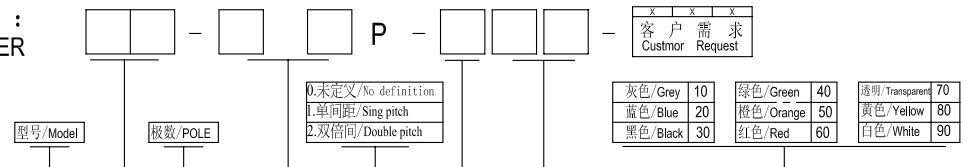

TOLERANCES EXCEPT AS NOTED

variable range	linear dimension					fillet	chamfer	短角 sid	≡	—	□	//	⊥				
	to 6	over 6 to 30	over 30 to 120	over 120 to 480	over 480 to all									to 6	to 10	to 50	to 120
tolerance	±0.1	±0.2	±0.3	±0.5	±0.9	±0.2	±0.5	±1	1 $^{\circ}$	30'	20'	10'	0.5	0.025	0.06	0.12	0.4

单位/UNITS	mm	尺寸/SIZE	A4	比例/SCALE	第一视角/FIRST ANGLE PROJECTION	
慈溪市万捷电子有限公司 CIXI WANJIE ELECTRONIC CO., LTD					名称/NAME	WJ141V-2.54-XXP-1YY-00A